

## [Jul. 2016-NEW] Download Braindump2go 210-065 Questions and Answers 192q Free [NQ51-NQ60]

2016 July Cisco Official - 210-065:Implementing Cisco Video Network Devices (CIVND) Exam Questions New Updated Today in Braindump2go.com for Free Instant Download! 100% Exam Pass Guaranteed! NEW QUESTION 51 - NEW QUESTION 60:

1. |2016 Latest Cisco 210-065 PDF Dumps & 210-065 VCE Dumps 192Q&As Instant Download:




<http://www.braindump2go.com/210-065.html> [100% Exam Pass Promised!] 2. |2016 New Cisco 210-065 Exam Questions PDF - Google Drive: <https://drive.google.com/folderview?id=0B272WrTALRHcRWU0dTZQQUpjMVU&usp=sharing> QUESTION 51

Which four characteristics are associated with video? (Choose four) A. greedy B. TCP retransmits C. UDP priority D. delay sensitive E. drop sensitive F. benign G. bursty Answer: CDEG QUESTION 52 Which type of packet-oriented network has the characteristic of being drop-tolerant and delay-insensitive? A. data B. voice C. video D. converged E. All packet-oriented networks share these characteristics. Answer: A QUESTION 53 When placing a call from Cisco Jabber Video for TelePresence to the Cisco TelePresence System Codec C40, which FECCs are available? A. Only zoom-in and zoom-out are available. B. Only left and right are available. C. Only up and down are available. D. No FECC is available. E. Left, right, up, down, zoom-in, and zoom-out are all available. Answer: E QUESTION 54 Which statement is correct regarding the difference between Multisite and Multiway conferencing? A. Multisite requires configuration on the endpoint, whereas Multiway requires the Multiway options key to be installed. B. Multisite requires the presence of a multipoint control unit, whereas Multiway relies on the endpoint conferencing capability. C. Multisite is used to conference in multiple sites, whereas Multiway is intrasite multipoint conferencing. D. Multisite requires the Multisite options key to be installed and configured at the endpoint, whereas Multiway requires a Cisco TelePresence Video Communications Server and a centralized multipoint control unit. Answer: D QUESTION 55 Which two of these can cause registration problems for a Cisco TelePresence Codec C40 endpoint running in H.323 mode? (Choose two.) A. The IP default gateway address is incorrect for the endpoint. B. The H.323 license stack is not added to the endpoint. C. The MAC address for the endpoint has not been added to the Cisco TelePresence VCS. D. The E.164 H323 Alias has not been configured on the endpoint. E. The URI address has not been configured on the endpoint. Answer: AD QUESTION 56 What is the main difference between Cisco Jabber and Cisco Jabber Video for TelePresence? A. Cisco Jabber registers to the Cisco Unified Communications Manager, whereas Cisco Jabber Video for TelePresence registers to the VCS. B. Cisco Jabber Video for TelePresence registers to Cisco Unified Communications Manager, whereas Cisco Jabber registers to the VCS. C. Cisco Jabber has no video calling capabilities, whereas Cisco Jabber Video for TelePresence has video capabilities. D. Cisco Jabber has no presence capabilities, whereas Cisco Jabber Video for TelePresence has presence capabilities. E. There is no difference between Cisco Jabber and Cisco Jabber Video for TelePresence. They should not coexist in the same network. Answer: A QUESTION 57 Refer to the exhibit. Which two of these can cause the phone status error icon that is shown in the exhibit? (Choose two.)



A. The Cisco Unified Communications Manager IM and Presence Service is not available. B. The username and password in Cisco Jabber phone services are misconfigured. C. The Cisco Jabber initial audio and video settings need to be set. D. There is no

DN configured for the Cisco Unified Client Services Framework in Cisco Unified Communications Manager.E. The Cisco Jabber does not have the correct phone button template and hence cannot register to the Cisco Unified Communications Manager.F. The called user presence status is unknown. Answer: BD QUESTION 58In this item, you will need to use all information presented to you to successfully answer the question. The Cisco Telepresence Codec C90 is unable to call the Cisco IP Video Phone. Assuming that the calling search space has been configured correctly, which of the these can cause this issue?

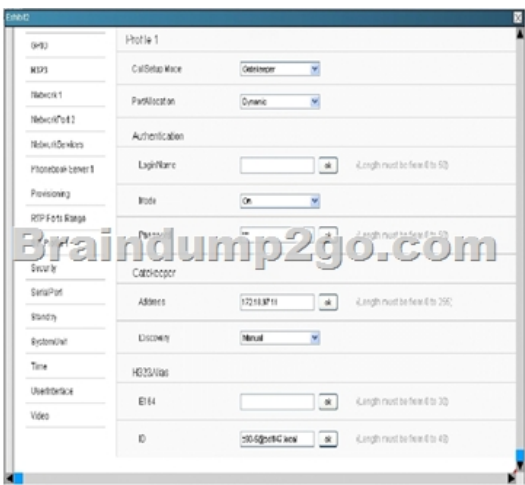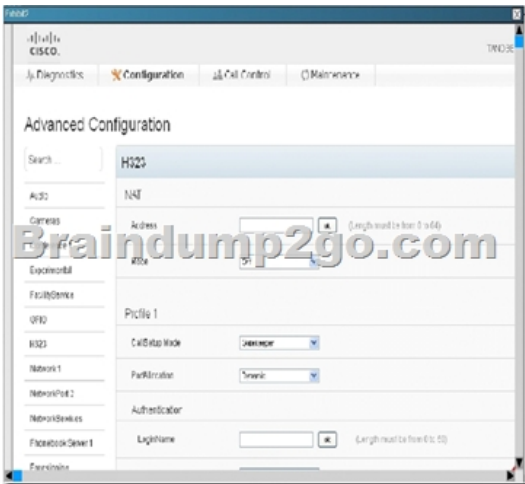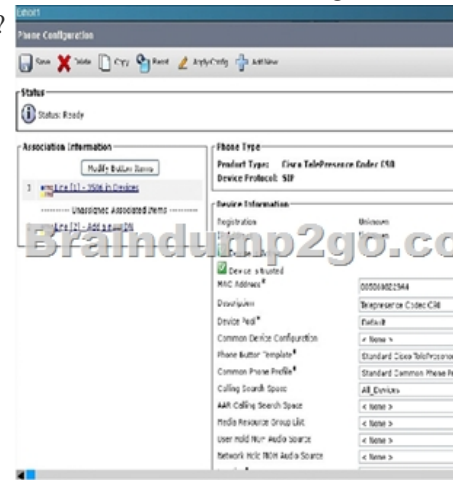

- A. The Cisco Telepresence Codec C90 can only be registered to a Cisco Telepresence Video Communication Server.
- B. A multipoint control unit is required in order for the call to work.
- C. The Cisco Telepresence Codec C90 can only be registered as a SIP endpoint to Cisco Unified Communications Manager.
- D. URI dialing has not been configured on Cisco Unified Communications Manager.
- E. The Cisco Telepresence Codec C90 Profile 1 > CallSetupMode must be configured as a

